

↑ Top

Tuck (2.5cm depth)

Tuck (2cm depth)


Front portion

Side →

← Center

Copyright (c) 2009 Zannalee's. All rights reserved.

↓ Bottom

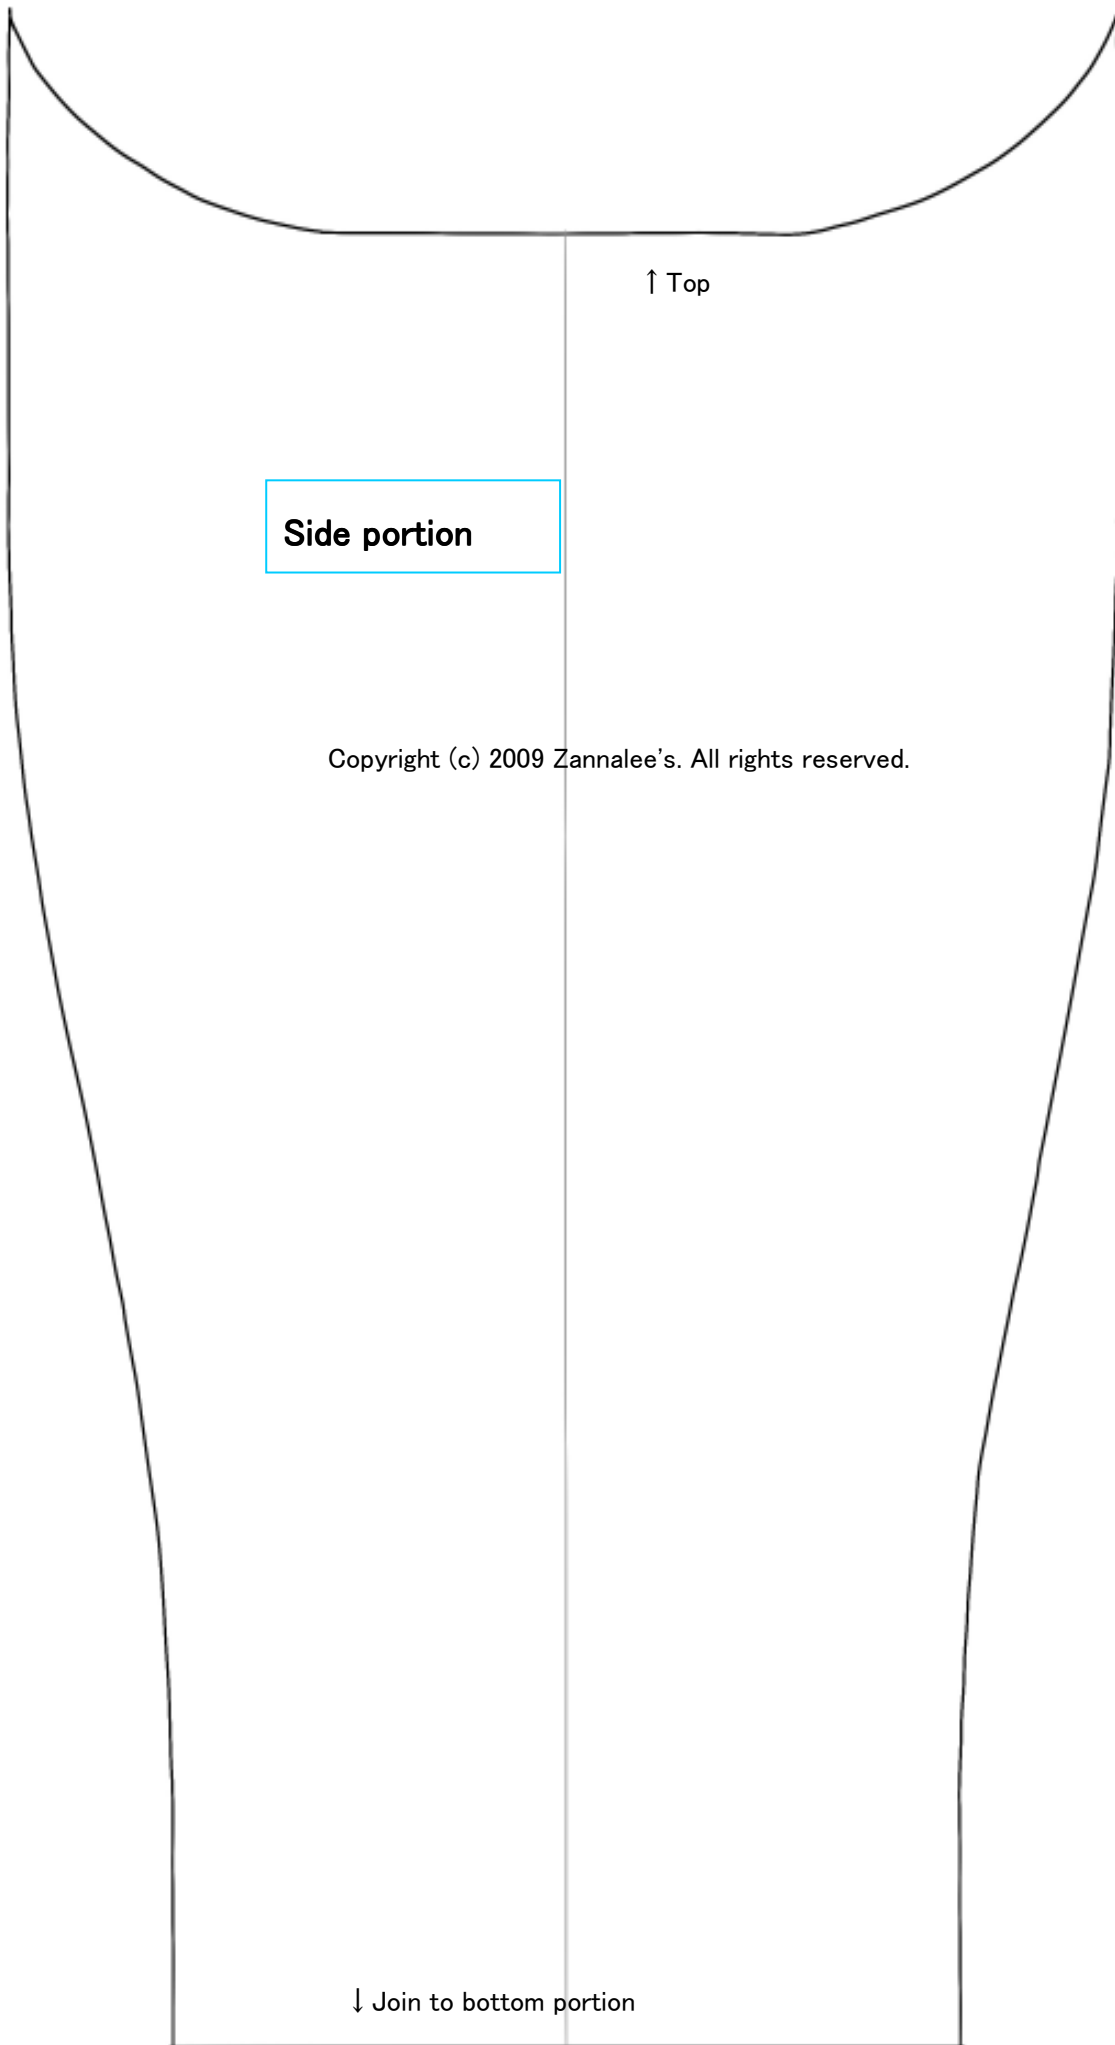


Side portion

↑ Top

Copyright (c) 2009 Zannalee's. All rights reserved.

↓ Join to bottom portion

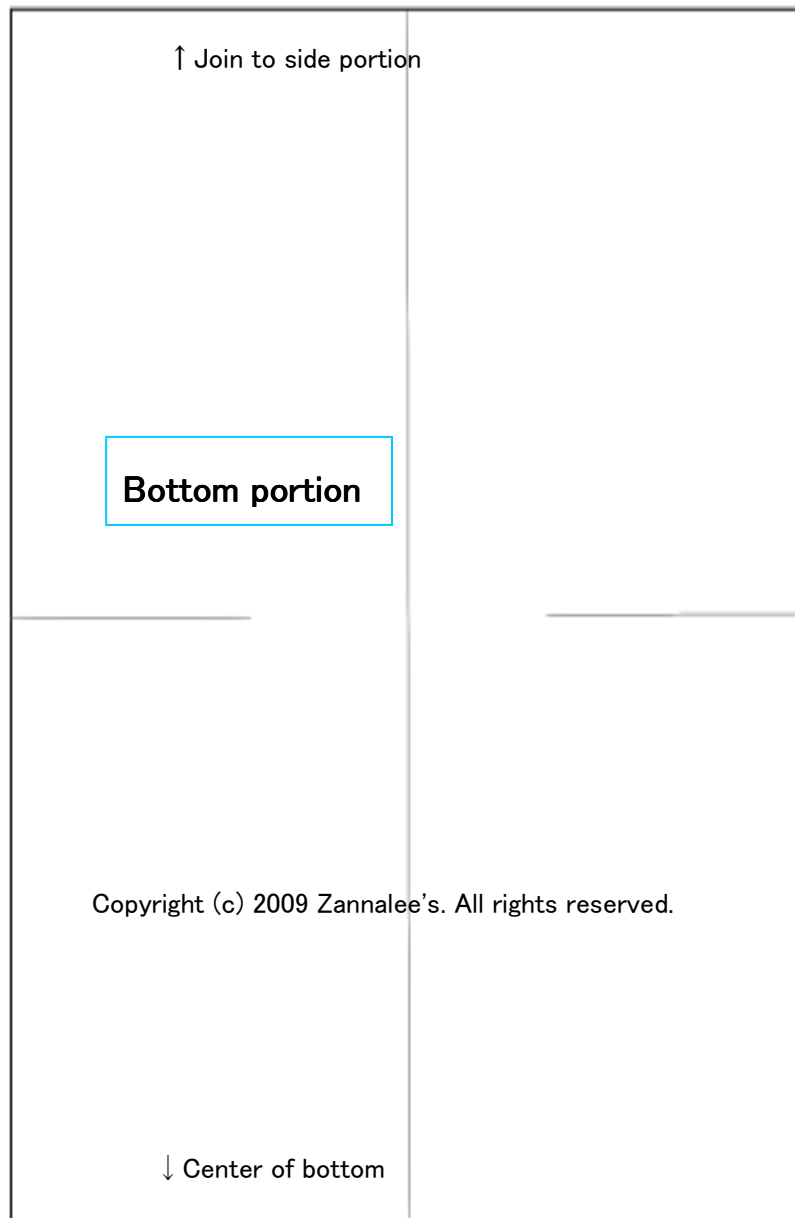

Allowances

Front portion ... Rough cut before cut-work process. After the cut-working, cut with 1cm seam allowance at the side and the bottom edges. Cut without seam allowance at the top edge.

Side portion ... Cut without seam allowance at the top edge, cut with 1cm seam allowances at other edges.


Bottom portion ... Cut with 1cm seam allowances around the motif.

Binding

Cut 2(two) fabrics (Sailcloth) 6cm width × 24cm length

Handles and side binding

Cut 2(two) fabrics (Sailcloth) 6cm width × 70cm length

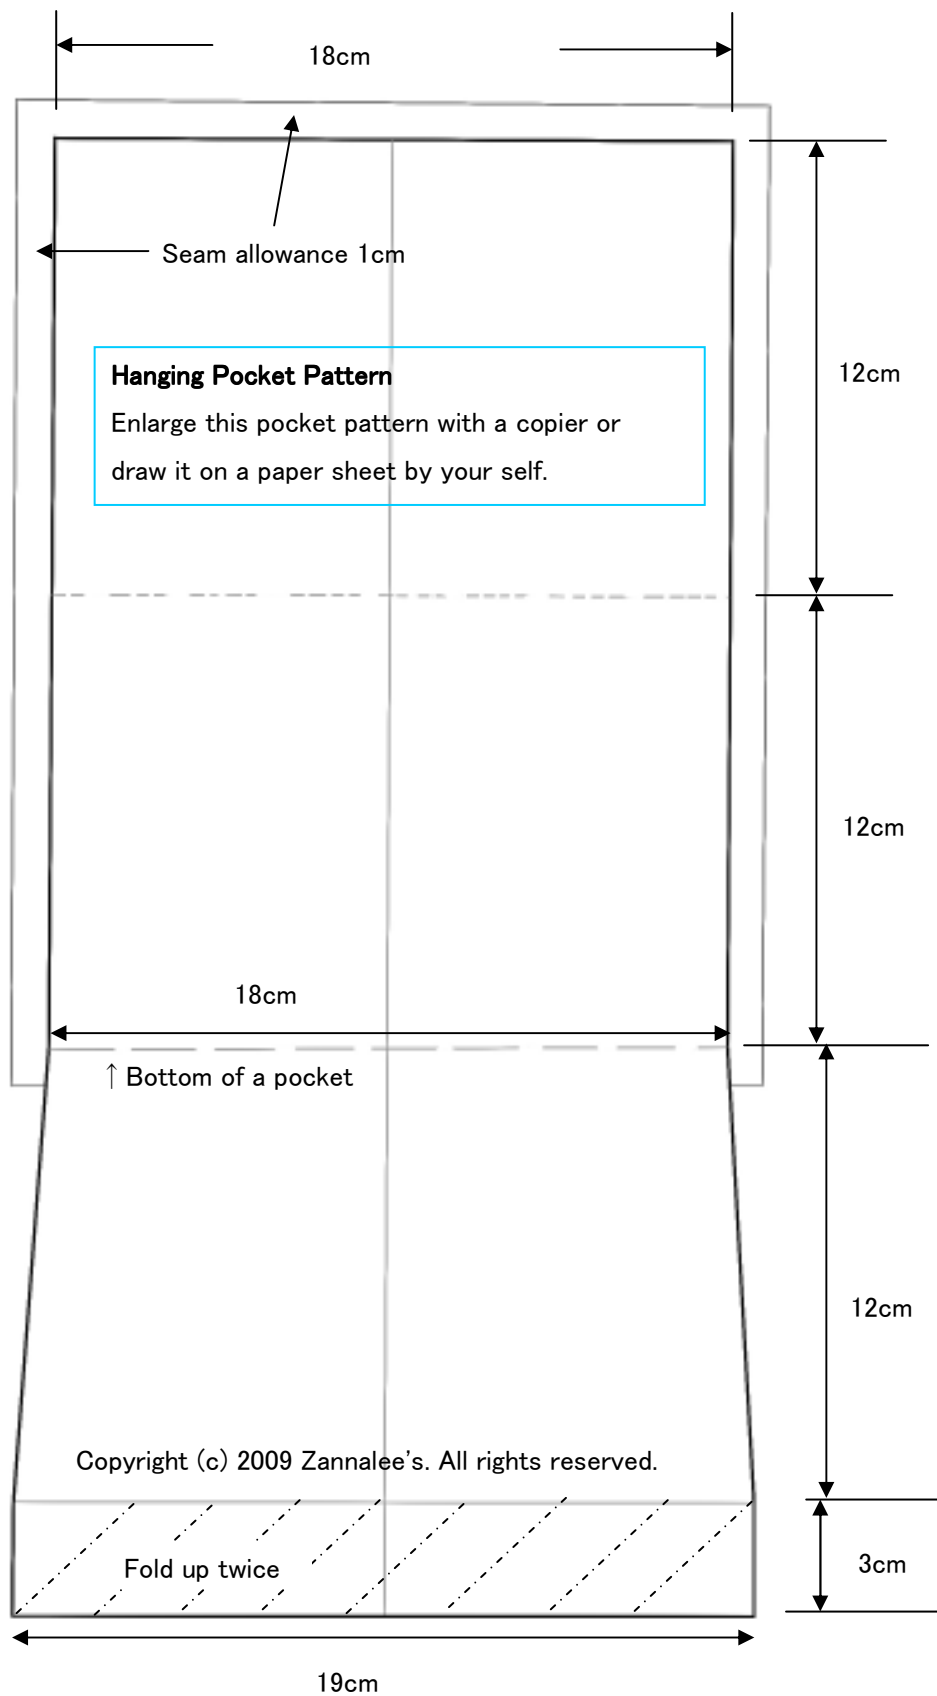

I used Nylon Oxford for a pocket.

It's non fray fabric.

If you use any fray fabric, cut the side seam allowances 2cm, fold twice and stitch the edges.